


Foam Masking Tape

Description

Bodyline Foam Masking Tape is designed for masking door apertures to stop the ingress of spray paint whilst being sprayed, during repair.

Product Construction

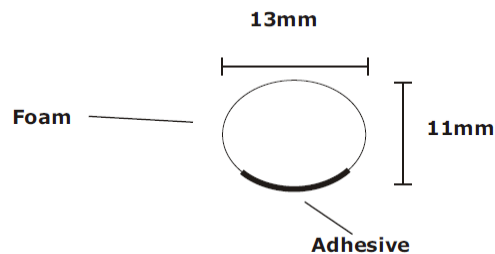

Shelf Life

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

Physical Properties

Values shown are typical values not to be used for specification purposes.

Foam	White
Adhesive	Rubber
Thickness	11mm (+/- 1mm)
Width	13mm (+/- 2mm)
Length	50m (+/- .5m e)
Density	30 kg/m ³ (+/- 4 kg/m ³)

Performance Properties

Values shown are typical values not to be used for specification purposes.

Peel Adhesion N/25mm	6
Shear Adhesion h/23°C	>10
UV Resistance	Limited
Temperature Resistance 1h/°C	95

The information contained in this sheet represents our current data and best opinion as to the proper use in handling of this product under normal conditions. Any other use or process is the responsibility of the user.

FOR PROFESSIONAL USE ONLY